

## T11 UltraSlim


Category: Toroidal

Type: UltraSlim

UltraSlim superlight toroidal tanks

Ultraslim (thin wall) superlight external toroidal tank for multivalve at 0 deg. Optional mounting with brackets that can be customized to specific vehicle architecture. This type of tank is usually mounted underbody in the spare tyre area.

- Design pressure: 30 bar
- Approval: ECE R67
- Multivalve: 0 deg
- Standard color: black RAL 9005

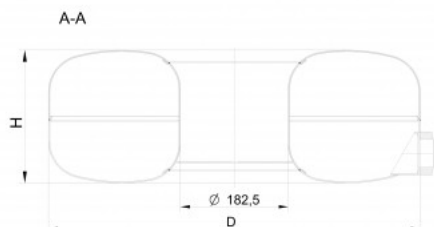

## STAKO))

Part number	Diameter D [mm]	Height H [mm]	Capacity V [ltr]	Capacity V 80% [ltr]	Weight [kg]
T52002811	520	180	28	22	14
T52003611	520	225	36	29	15
T56503411	565	180	34	27	15
T56503811	565	200	38	30	17
T58004111	580	200	41	33	17
T58004611	580	225	46	37	17
T60004211	600	200	42	34	17
T60004811	600	225	48	37	18
T60005411	600	250	54	43	20
T60005911	600	270	59	47	21
T63004511	630	190	45	36	17
T63004811	630	200	48	38	18
T63005511	630	225	55	44	19
T63006211	630	250	62	49	20
T63006611	630	270	66	53	22
T65005011	650	200	50	40	19
T65005611	650	220	56	44	20
T65006211	650	240	62	49	21
T65006511	650	250	65	52	-
T65007111	650	270	71	56	22
T65007911	650	300	79	63	23
T68005411	680	200	54	43	23
T68006711	680	240	67	54	26
T68007711	680	270	77	62	27
T72006411	720	200	64	51	27
T72007511	720	230	75	60	29
T72008311	720	250	83	66	30
T72009011	720	270	90	72	31