

## T12 UltraSlim



Category: Toroidal

Type: UltraSlim

UltraSlim superlight toroidal tanks

Ultraslim (thin wall) superlight internal toroidal tank for multivalve at 30 deg. Optional mounting with brackets that can be customized to specific vehicle architecture. This type of tank is usually mounted in the trunk in the spare tyre area.

- Design pressure: 30 bar
- Approval: ECE R67
- Multivalve: 30 deg
- Standard color: black RAL 9005

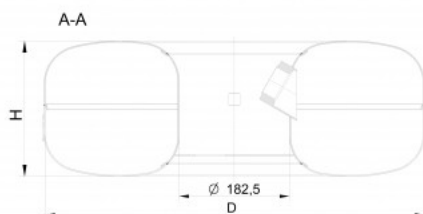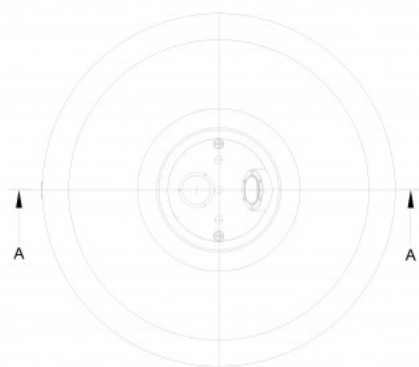

## STAKO))

Part number	Diameter D [mm]	Height H [mm]	Capacity V [ltr]	Capacity V 80% [ltr]	Weight [kg]	Steel thickness [mm]
T52002812	520	180	28	22	14	2.3
T52003612	520	225	36	29	15	2.3
T56503412	565	180	34	27	15	2.3
T56503812	565	200	38	30	17	2.3
T58004112	580	200	41	33	17	2.3
T58004612	580	225	46	37	17	2.3
T60004212	600	200	42	34	17	2.3
T60004812	600	225	48	38	18	2.3
T60005412	600	250	54	43	20	2.3
T60005912	600	270	59	47	21	2.3
T60006512	600	290	65	52	21	2.3
T63004512	630	190	45	36	17	2.3
T63004812	630	200	48	38	18	2.3
T63005512	630	225	55	44	19	2.3
T63006212	630	250	62	49	21	2.3
T63006612	630	270	66	53	22	2.3
T65004412	650	180	44	35	18	2.3
T65005012	650	200	50	40	19	2.3
T65005612	650	220	56	44	20	2.3
T65006212	650	240	62	49	21	2.3
T65006512	650	250	65	52	21	2.3
T65007112	650	270	71	56	22	2.3
T65007912	650	300	79	63	23	2.3
T68004712	680	180	47	38	22	2.5
T68005412	680	200	54	43	23	2.5
T68006112	680	220	61	49	24	2.5
T68006412	680	230	64	51	24	2.5
T68006712	680	240	67	54	26	2.5
T68007112	680	250	71	57	26	2.5
T68007712	680	270	77	62	27	2.5

**STAKO))**

Part number	Diameter D [mm]	Height H [mm]	Capacity V [ltr]	Capacity V 80% [ltr]	Weight [kg]	Steel thickness [mm]
T72006412	720	200	64	51	27	2.7
T72007512	720	230	75	60	29	2.7
T72008312	720	250	83	66	30	2.7
T72009012	720	270	90	72	31	2.7
T72010012	720	300	100	80	33	2.7